



产品尺寸:


型号:02.FGG.3B.108.CA112ZN

定位键 芯数 线夹
≈58.75

≈43.75

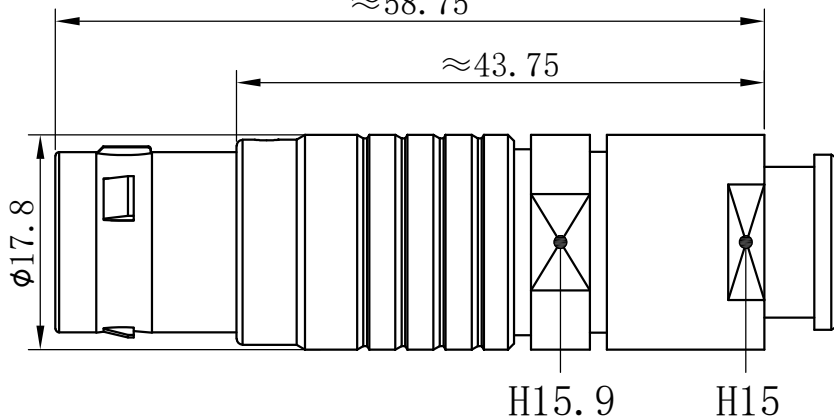


插头气嘴尺寸



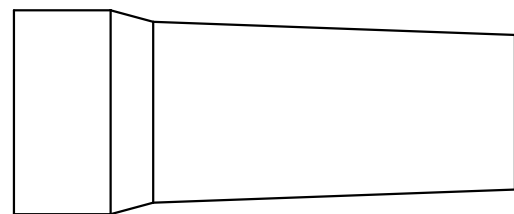


型号:EGG.3B.108.CL


定位键 芯数
27mini

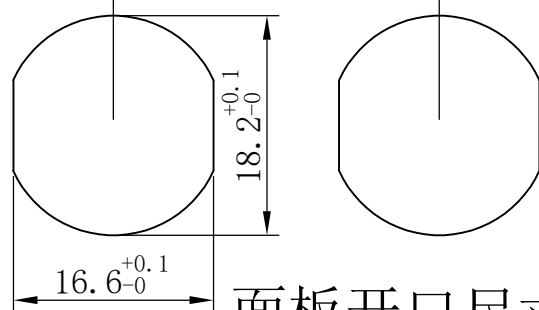


面板开口尺寸

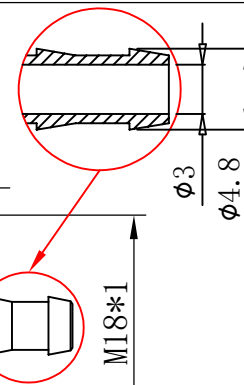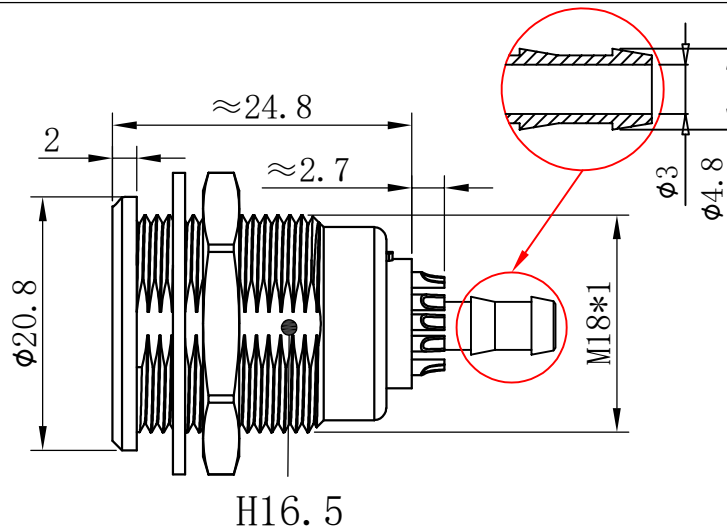

焊接端视图:



公针芯焊接端
焊接排序图



母针芯焊接端
焊接排序图

- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护 套:黑色TPU
- 针芯材料:铜合金镀金
- 插拔次数:>5000次
- 防护等级:(插合时)IP50
- 工作温度:-40℃~+150℃
- 相对湿度:60℃时, 93±2%
- 震 动:10~2000HZ, 15g
- 冲 击:100g, 6ms
- 耐 盐 雾:144h
- 绝缘电阻:>5000MΩ
- 接触电阻:6mΩ
- 额定电流:8A
- 针芯数量:8Pin
- 气管芯数:1Pin
- 气管规格:4*6
- 最大工作压强:6bar
- 针芯规格: $\phi 0.9$
- 适配线径:6.0-12.0