
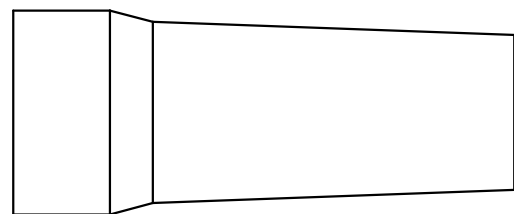
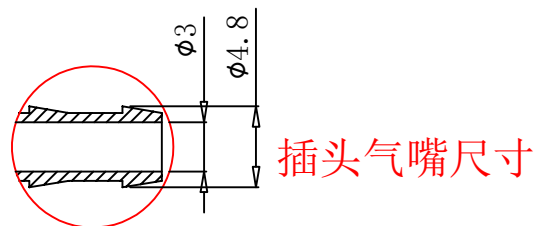


产品尺寸:

型号:02.FGG.3B.113.CA120ZN


定位键 芯数 线夹
≈58.75

≈43.75

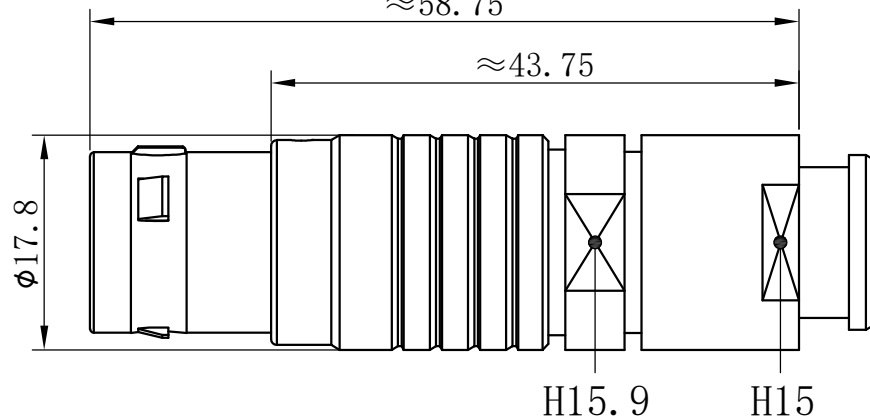


型号:EGG.3B.113.CL



定位键 芯数
27mini

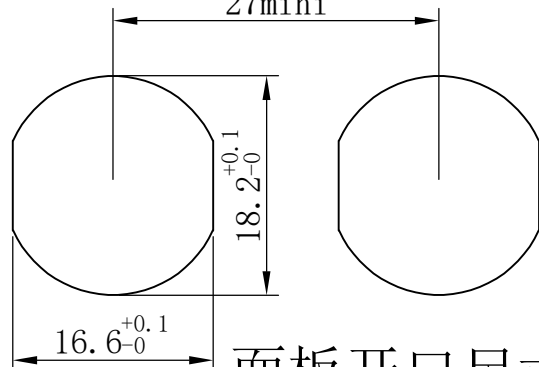

面板开口尺寸

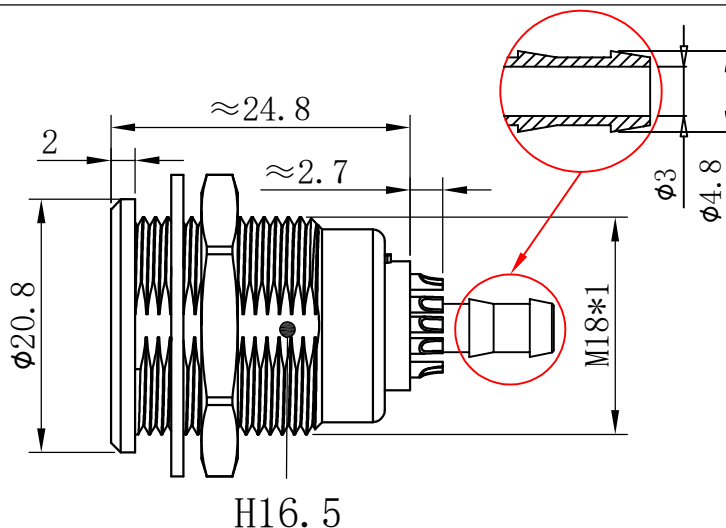

焊接端视图:



- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护 套:黑色TPU
- 针芯材料:铜合金镀金
- 插拔次数:>5000次
- 防护等级:(插合时) IP50
- 工作温度:-40℃~+150℃
- 相对湿度:60℃时, 93±2%
- 震 动:10~2000HZ, 15g
- 冲 击:100g, 6ms
- 耐 盐 雾:144h
- 绝缘电阻:>5000MΩ
- 接触电阻:8mΩ
- 额定电流:5A
- 针芯数量:13Pin
- 气管芯数:1Pin
- 气管规格:4*6
- 最大工作压强:6bar
- 针芯规格:φ0.7
- 适配线径:6.0-12.0