



产品尺寸:

型号:02.FGG.3B.214.CA120ZN

定位键 芯数 线夹

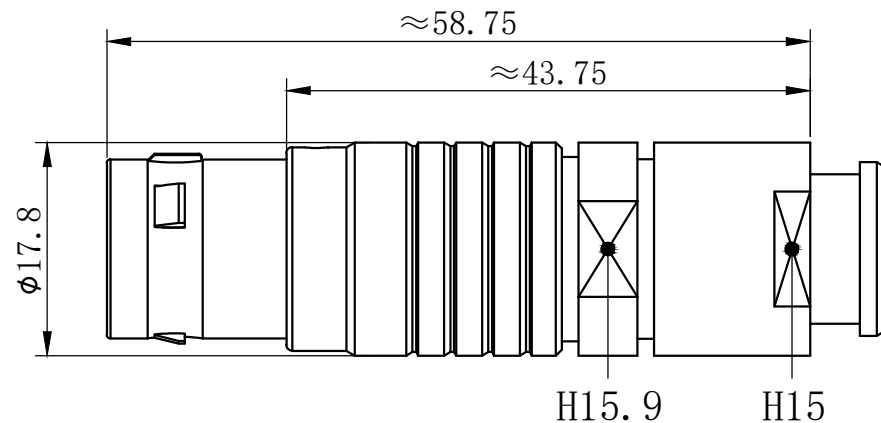



插头气嘴尺寸



- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护套:黑色TPU
- 针芯材料:铜合金镀金
- 插拔次数: >5000 次
- 防护等级:(插入时)IP50
- 工作温度: $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- 震动: $10 \sim 2000\text{HZ}$, 15g
- 冲击:100g, 6ms
- 耐盐雾:144h
- 绝缘电阻: $>5000\text{M}\Omega$
- 接触电阻: $8\text{m}\Omega$
- 额定电流:4A
- 针芯数量:14Pin
- 针芯规格: $\phi 0.7$
- 气管芯数:2Pin
- 气管规格:2.5*4/ 4*6
- 最大工作压强:6bar
- 插头适配线径:6.0-12.0

型号:EGG.3B.214.CL

定位键 芯数

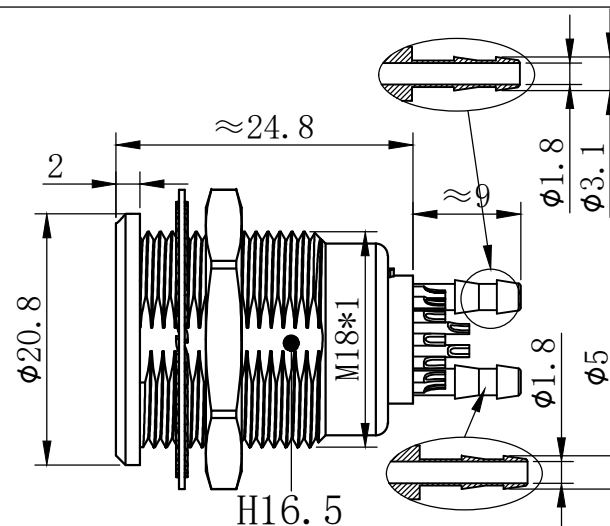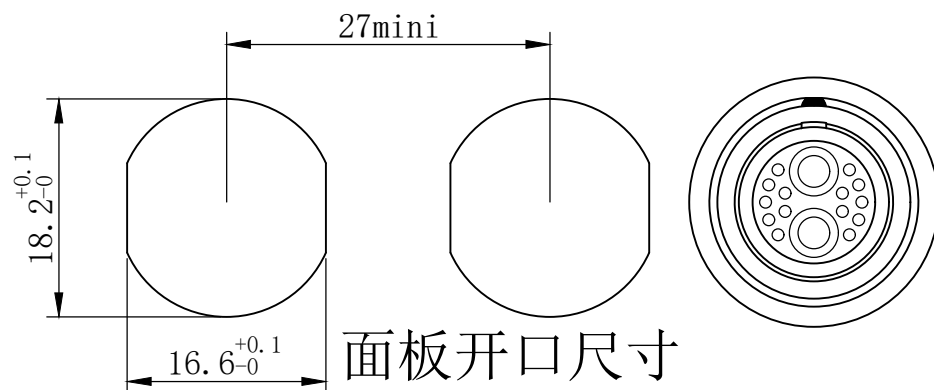

焊接端视图:

