



产品尺寸:

型号: H. 02. FGG. 4B. 218. -14. CA152M

定位键

芯数

线夹

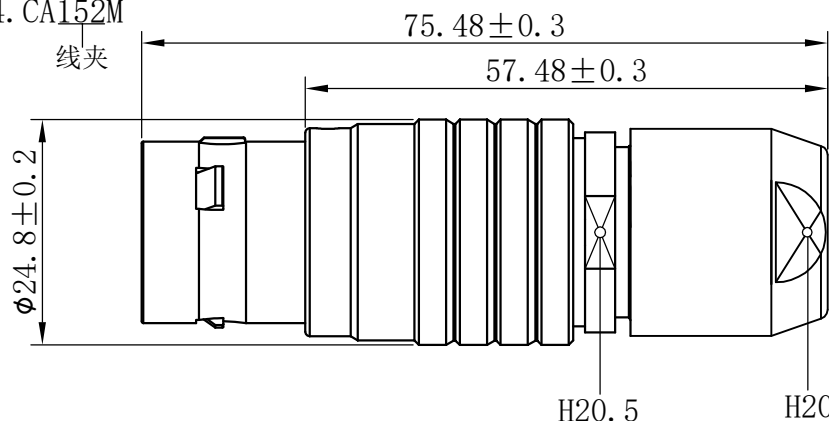




- 外壳材料: 铜合金镀珍珠铬
- 绝缘材料: PPS
- 针芯材料: 铜合金镀金
- 插拔次数: >5000次
- 防护等级: (插合时) IP50
- 工作温度: -40°C ~ +150°C
- 震 动: 10~2000HZ, 15g
- 冲 击: 100g, 6ms
- 耐 盐 雾: 144h
- 绝缘电阻: >5000MΩ
- 接触电阻: 6mΩ
- 额定电流: 5A
- 针芯数量: 14Pin
- 针芯规格: φ0.9
- 气嘴数量: 2Pin
- 最大工作压强: 6bar
- 插头适配线径: 12-15.5

型号: H. EGG. 4B. 218-14. CL


定位键

芯数

36mini

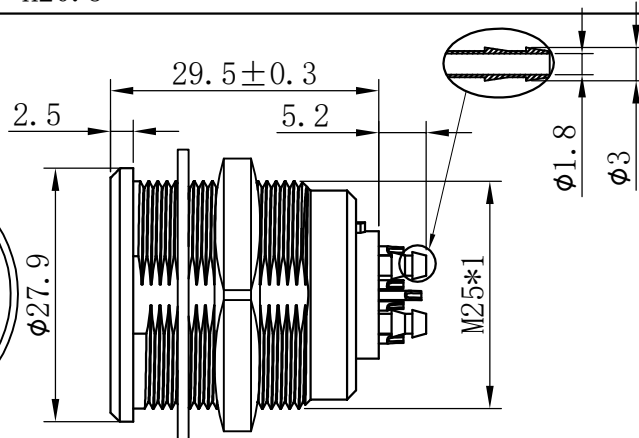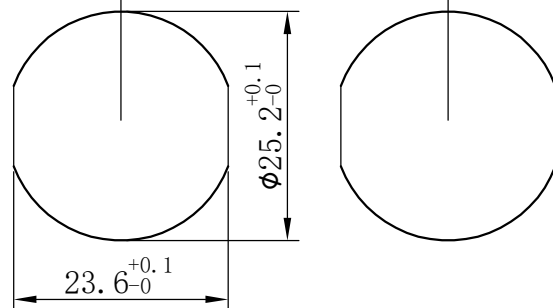


焊接端视图:

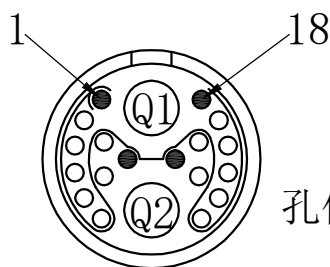

公针芯焊接端
焊接排序图

白色填充孔位不装针
孔位序号分别为1. 9. 10. 18

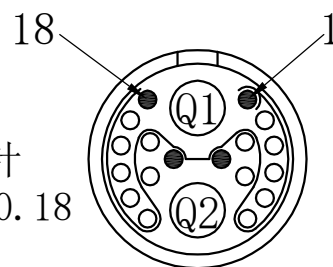

母针芯焊接端
焊接排序图